

S Series

Specification Sheet

Accurate real-time air quality information, made affordable

Designed for those who need a handheld device to gather real-time information on the surrounding air.

A simple tool for professionals and enthusiasts alike, the portable monitors can be configured with 28 different gas and particle sensors.

Suitable for measuring target gases in ambient air at different concentrations in outdoor or indoor environments.




What are they for?

- Environmental impact assessments
- Indoor air quality testing
- Checking air pollution “hot spots”
- Educational tool for schools
- Community air pollution monitoring
- Validating air quality models
- Health and safety compliance
- Personal exposure monitoring

What are they for?

- Interchangeable sensor heads enable measurement from a choice of 16 different gases or particulates.

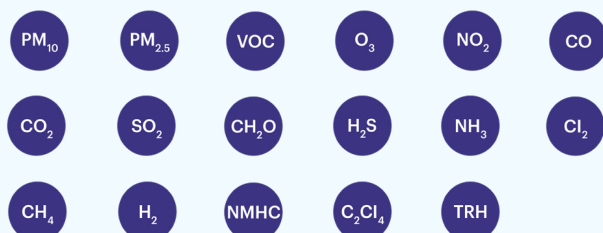

Who is it for?

- **Air quality professionals** who need real-time defensible measurements
- **Community groups** who need cost-effective scientifically credible air quality data
- **Educators** who want students to learn about air pollution in a way that supports STEM
- **Health and safety managers** who need to demonstrate safe environments
- **Researchers** who want to collect scientifically robust data on a limited budget
- **Environmental consultants** who need a portable device for periodic and discrete monitoring
- **Citizens** who want to measure their personal exposure to air pollution

Specifications | S Series portable air quality monitors

S Series system specifications		Series 300	Series 500
Measurement units	Gas: ppm or mg/m ³ Humidity: % Temperature °C or °F	✓	✓
Reading functions	Instant, minimum, maximum, average	✓	✓
Sensor head	Active fan sampling to ensure high accuracy measurements, interchangeable, replaceable	✓	✓
Sensor head calibration	Zero and span calibration	✓	✓
Temperature & humidity sensor	Range -40°C to 124°C (-40°F to 255°F); Range 0 to 100% RH	✓	✓
Environmental operating conditions	Temperature: -5°C to 45°C Humidity: 0 to 95% non-condensing	✓	✓
Display status indicators	Battery, sensor, standby	✓	✓
Power supply	12Vdc (power adaptor/charger supplied 100-250Vac)	✓	✓
Rechargeable battery	Lithium-ion 12Vdc 2700 mA.h	✓	✓
Enclosure material and rating	PC and ABS; IP20 and NEMA 1 equivalent	✓	✓
Size	(L x W x D) 195 x 122 x 54 (mm); 7 7/8 x 4 3/4 x 2 1/8 (in) (with sensor head)	✓	✓
Weight	<460g; <16oz (with sensor head and battery)	✓	✓
Approvals	Part 15 of FCC Rules; EN 50082-1: 1997; EN 50081-1: 1992	✓	✓
Analog output	0-5V	✓	✓
Clock function	Real time		✓
Digital interface	RS-232 to USB		✓
Data logging	Up to 8,188 records (2706 incl. Temp/RH)		✓
PC data logging (Windows)	Software and data cable supplied. Link data to a specific location and monitor		✓

For the full range of available sensors heads, visit our website: www.aeroqual.com or [download the list](#).

Optional Accessories



**Temperature/ RH
Sensor
HH TRH**



**Wall Bracket
AS R33**



**Industrial Enclosure
HH ENC**



**Remote Sensor Kit
AS R10**



**IP41 Remote Sensor
Kit
AS R13**



**Cigarette Lighter
Adaptor
AS R32**



**Lithium Battery
AS R36**



**Carry Case Small
AS R40**



**Carry Case Large
AS R41**



**SHAMMA SRL
DISTRIBUIDOR AUTORIZADO**

www.shammasrl.com
ventas@shammasrl.com
f in Shamma SRL

Tel.: (2) 2491053
Cel.: 71596978



MRK-D-0043 V5